

OPTION: CONTROL I/O. RS-232/422/485. PRINTER INTERFACE. BCD. 4-20mA. 0-10V.

# BDI-2006 WEIGHING INDICATOR & CONTROLLER

Breakthrough High Display Resolution **(HDR)**

Batching Control (Feeding & Loss-in-Weight)


120 Times/Sec A/D Conversion Rate  $\Sigma-\Delta$

Fully Digital Calibration **(FDC)**

LED Screen Shows: Code, Final Weight, SP1 Value(SP2, Free Fall)/Count, Accumulation /Gross, Tare, Net Value.

Finish Weight Check **(HI-LO)**

Compact Size

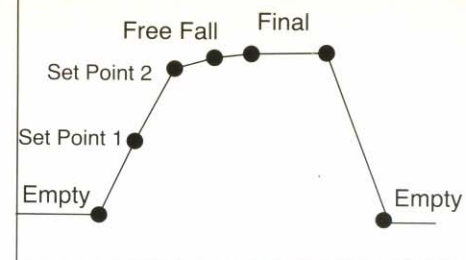

## BDI-2002 Weighing Indicator & Controller Features:

- \* 3 Column of LED shows: Code, Final Weight, SP1 Value(SP2, Free Fall)/Count, Accumulation /Gross, Tare, Net Value.
- \* Easy to input weight values by numeric keys: 0 to 9.
- \* 1/16,000 display resolution (Max. 1/ 60,000 depending on load cell quality & performance).
- \* Internal Resolution 1,000,000, A/D Conversion rate 120 times/ Sec.
- \* Watchdog virtually eliminates malfunctions that associated with computerized equipment or software failure.
- \* Full Digital Calibration makes setting ZERO and SPAN Calibration an easy task.
- \* Drives up to 8 parallel connecting load cells. (350 $\Omega$ )
- \* 8k bytes SRAM with Li-battery backup. Information will not disappear even power failure.
- \* The settings of function and weighing parameters are all stored in the EEPROM, with storage duration over 40 years.
- \* Important values and parameters can have storage backup.
- \* Users can adjust the intensity of digits filter to avoid mechanical vibration that caused by external environments to achieve high-speed and accurate measurement.

- \* Set point codes can store up to 100 sets of: Final, SP1, SP2, Free Fall, HI, LO.
- \* Automatic Free Fall Compensation provides closer tolerance and precise weighing.
- \* 8 Set of control Input: ①ZERO Input, ②TARE Input, ③TARE reset, ④Start batch, ⑤Abort batch, ⑥Print Accumulator, ⑦Print Input, ⑧Clear ACC. & COUNT.
- \* 8 Set of control output: ①ZERO Band output, ②SP1 output, ③SP2 output, ④(Final-Free Fall) output, ⑤HI output, ⑥ LO output, ⑦Final output, ⑧MD/Error output.
- \* 5 batching modes: ①Customer Programmed Control Mode: Normal Batching, ② Customer Programmed Control Mode: Loss-in-weight batching, ③Built-in Automatic Program Mode: Normal batching, ④Built-in Automatic Program Mode: Loss-in-weight batching, ⑤ Multiple-Ingredient batching.
- \* Standard Serial Output (20mA Current Loop) for remote display.
- \* Optional printer interface can automatically print or output data includes date, time, set point code, serial number, weight, and unit.

### Analog Input and A/D Conversion

Type	BDI-2006
Input Sensitivity	$\cong 0.3 \mu\text{V/D}$
ZERO Adjustment Range	0~20mV
Max. Resolution	1/16,000(Max. 1/60,000 depending on load cell quality & performance)
Main Display (Green Tube)	3 Column, 7-segment, 8-digit displays the weight, with dots.
Minimum Division	x1, x2, x5, x10, x20, x50
Maximum Display	+800450
Load Cell Excitation	DC10V $\pm$ 1%, 230mA, Remote Sensing. Can be connected up to 8-(350 $\Omega$ Load Cells)
Non-Linearity	0.01%F.S.
A/D Conversion Method	$\Delta \Sigma$
A/D Resolution	$\cong 1/1,000,000$
A/D Conversion Rate	Approx. 120 Times/Sec.
Max. Load Cell Input Voltage	32mV
ZERO Temperature Comp.	$\pm (0.2 \mu\text{V} + 0.001\% \text{ of Dead Load})/^\circ\text{C}$ TYP
SPAN Temperature Comp.	$\pm 0.001\% ^\circ\text{C}$ TYP

### General

Type	BDI-2006
Power Requirements	AC 110V or AC 220V $\pm 10\%$ , 50/60Hz Approx. 17VA
Net weight	Approx. 3.2kg(7.054 LB)
Operation Temperature	-10 $^\circ\text{C}$ ~ 45 $^\circ\text{C}$
Maximum Humidity	85% (non-condensing)
Physical Dimensions	240 (D) X 190 (W) X 104 (H) mm

### Standard

Current Loop	20mA
--------------	------

### Options

OP-01	I/O Interface
OP-02	Serial Interface RS-232 or RS-422/485
OP-03	Printer Interface (Include Date and Time)
OP-04	Parallel BCD Output
OP-05	Analog Output 4~20mV
OP-06	Analog Output 0~10V

### Option Accessories

1	Mini Printer PH24
2	BDI-9910 Remote Display (Score Board)

## BENEDICTION ENTERPRISE CO., LTD.

BENEDICTION:NO.66, LANE 139, FONG-NIEN RD.  
FONG-YUNE CITY, TAICHUNG HS. TAIWAN R.O.C. 420  
TEL:886-4-25255468,25255469 FAX:886-4-25261659

E-mail:bde.com@msa.hinet.net

http://www.bde.com.tw

